



MALTA

_Refrigerators and freezers. Plug-in installation

The sales focal point.

Specially developed for smaller spaces, but with maximum sales impact. MALTA is accessible from all sides and products are easy to see.



VISUAL MERCHANDISING

MALTA combines attractive product presentation with optimum access to products from all four sides. Thanks to the bright LED interior lighting, MALTA achieves maximum sales impact in little space.



HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. The electronically controlled, variable-speed compressor (VS) reduces power consumption by 25%. In addition, the new energy-saving fan saves 0.5 kWh every day.



ENVIRONMENT AND CLIMATE

MALTA units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



LOW COSTS

The low investment outlay and operating costs speak for themselves. In addition, the outer-skin condenser on MALTA provides for completely maintenance-free refrigeration.



INTELLIGENT INSTALLATION

Ready-to-connect installation means MALTA can be used immediately.



SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured.



COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling	+3°C to +15°C ¹
Freezing	-18°C to -23°C
Mince meat/meat chilling	0°C to +2°C

¹ Fixed preset that can be changed by a service technician

USPs

INDEPENDENT POSITIONING

MALTA can be accessed from both sides. It is ideal for smaller retail spaces, because it can also be used as a standalone solution for narrower aisles.





MALTA 145



MALTA 185

CONFIGURATIONS

Solo



Row






ACCESSORIES

- _ Water protection strip (colour change on customer request)
- _ Vario grid system (rack inserts & wire dividers) & baskets & product dividers
- _ Optionally with rollers (picture of the rollers)
- _ Colour and styling options tailored to customer requirements (housing, protective bumper strip, plastic parts in 2 standard colours)
- _ Compatible with the Active Monitoring System (AMS)

MALTA 145 / 185

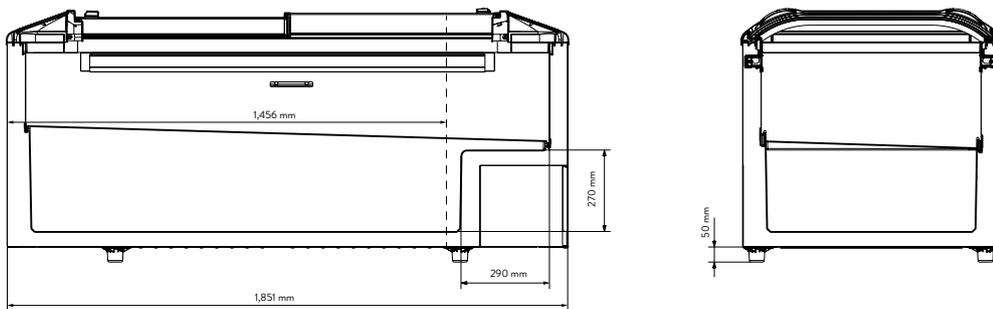

DIMENSIONS

MALTA		145	185
Length, exterior / interior	mm	1,456 / 1,328	1,851 / 1,723
Depth, exterior / interior	mm	855 / 723	855 / 723
Height, front / rear	mm	770 / 833	770 / 833
Stacking height, front / rear	mm	490 / 490	490 / 490

Subject to technical changes; errors and omissions excepted. Version: 01/2022



AHT Cooling Systems GmbH
 Werkgasse 57
 8786 Rottenmann | Austria
 p. +43 3614 24 51-000
 sales@aht.at
 www.aht.at



ATHEN XL

_Refrigerators and freezers. Plug-in installation

The absolute benchmark in energy efficiency.

ATHEN XL is the energy efficiency world champion! The world's most economical refrigeration unit also offers the most storage space for your products.



HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. In addition, the electronically controlled, variable-speed compressor (VS) ensures maximum energy efficiency.



LOW COSTS

The low investment outlay and operating costs speak for themselves. In addition, the outer-skin condenser on ATHEN XL provides for completely maintenance-free refrigeration. Ready-to-connect installation means ATHEN XL can be used immediately.



ENVIRONMENT AND CLIMATE

ATHEN XL units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured. The plastic interior drip tray guarantees easy cleaning.



COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling	+3°C to +15°C ¹
Freezing	-18°C to -23°C
Mince/meat/meat chilling	0°C to +2°C

¹ Fixed preset that can be changed by a service technician

USPs

ENERGY EFFICIENCY & TOTAL COST OF OWNERSHIP

ATHEN XL is a double world champion with the lowest power consumption and lowest total cost of ownership (TCO) on the global market.

LARGEST CAPACITY

ATHEN XL provides the largest capacity of all AHT refrigerators and freezers for your products. With up to 1071 litres, three pizzas fit one behind the other, for example, in the ATHEN XL 250.





STANDALONE UNIT



IN-LINE UNIT



BLOCK INSTALLATION

CONFIGURATIONS

Solo



Row




Block



Island



- _ optionally with end cabinet on both sides
- _ extendible with commercially available shelf attachments

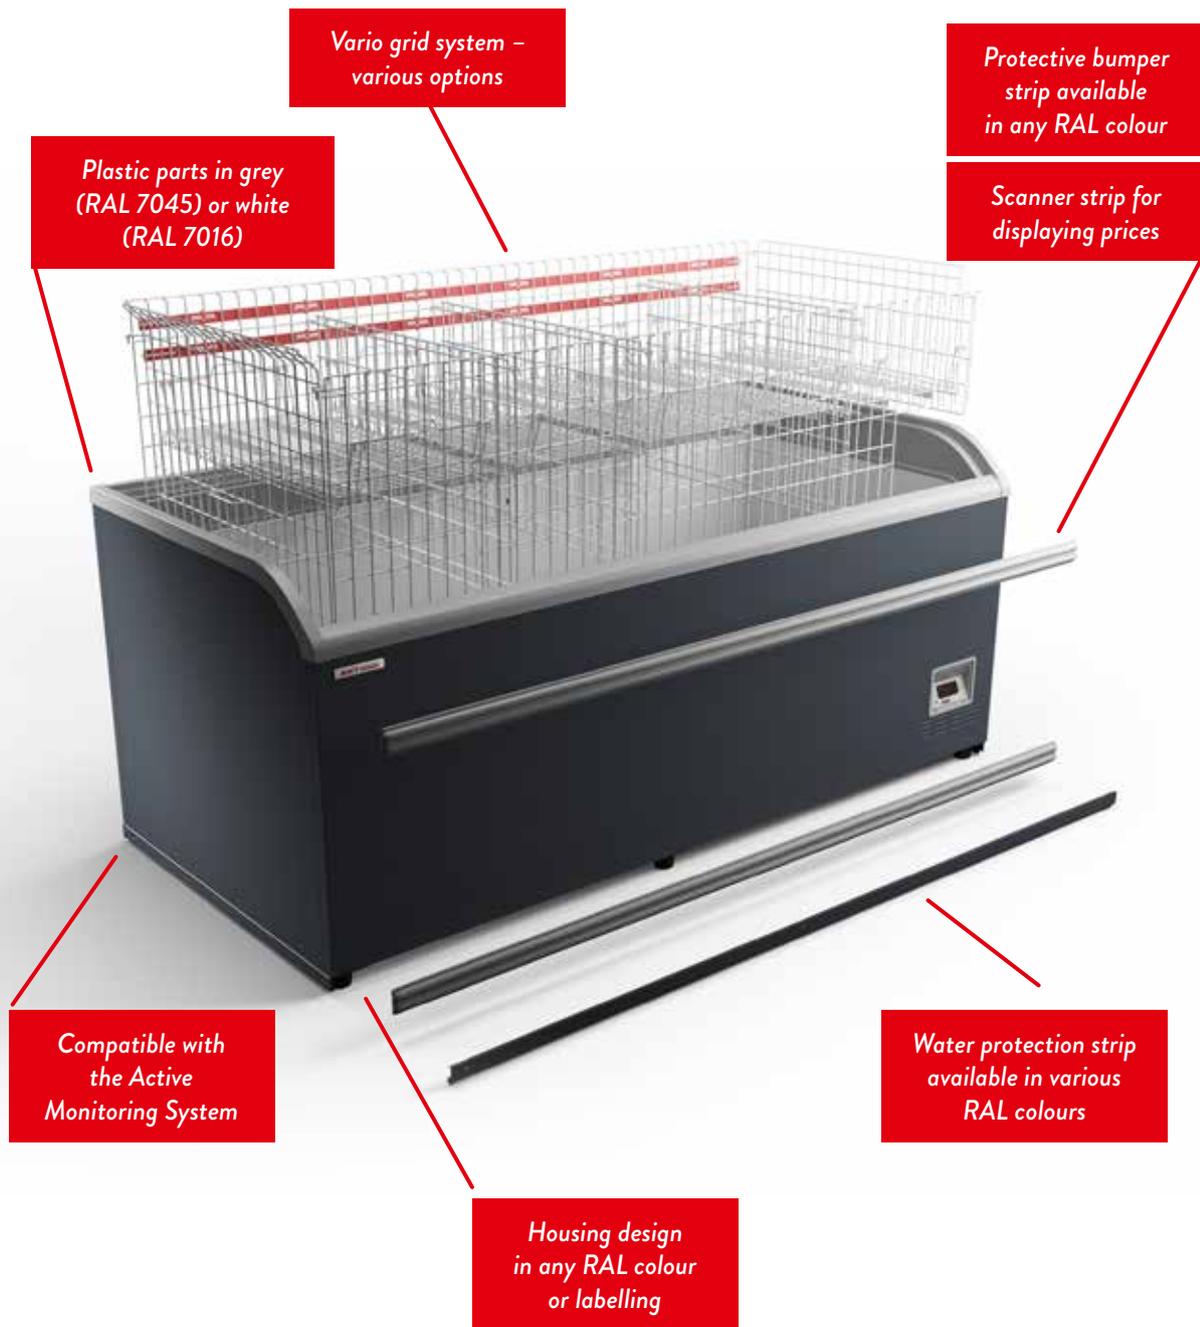


ACCESSORIES

- _ Price display for end cabinet (suitable for high cover)
- _ High cover (between the back-to-back units)
- _ Low cover (between the back-to-back units)
- _ Side cover (closes off the island at the sides)
- _ Water protection strip (colour change on customer request)
- _ Vario grid system (rack inserts & wire dividers) & wire basket inserts
- _ Scanner strips
- _ Impact protection
- _ Colour and styling options tailored to customer requirements (housing, protective bumper strip, plastic parts in 2 standard colours)
- _ Compatible with the Active Monitoring System (AMS)


ATHEN XL

EC 207

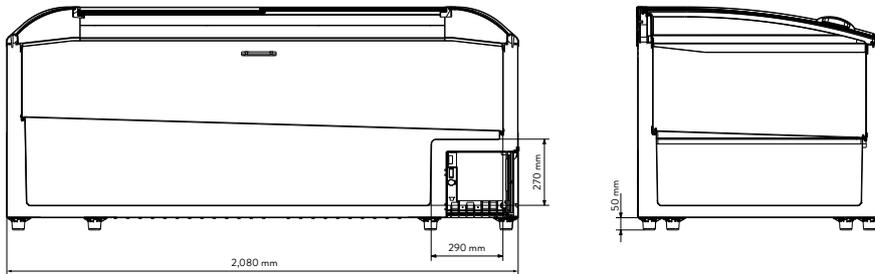

ATHEN XL

175 / 210 / 250

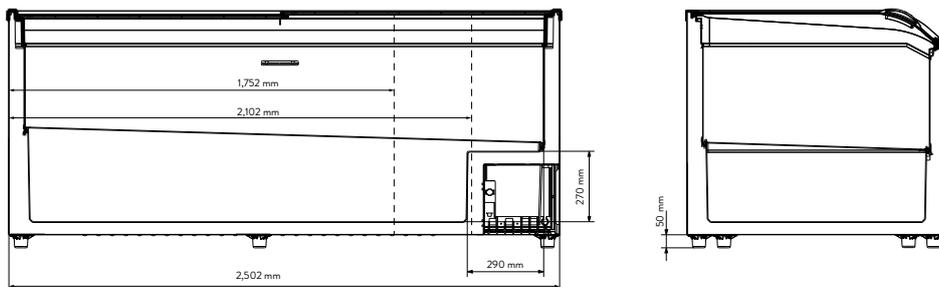

DIMENSIONS

ATHEN XL		175	EC 207	210	250
Length, exterior / interior	mm	1,752 / 1,623	2,080 / 1,948	2,102 / 1,973	2,502 / 2,373
Depth, exterior / interior	mm	994 / 863	994 / 863	994 / 863	994 / 863
Height, front / rear	mm	803 / 910	803 / 910	803 / 910	803 / 910
Stacking height, front / rear	mm	600 / 600	600 / 600	600 / 600	600 / 600

Subject to technical changes; errors and omissions excepted. Version: 01/2022



AHT Cooling Systems GmbH

Werksgasse 57
 8786 Rottenmann | Austria
 p. +43 3614 24 51-000
 sales@aht.at
 www.aht.at



IBIZA

_Refrigerators and freezers. Plug-in installation

More sales through perfect product visibility.

Compact, well-conceived freezer unit with four glass side panels for optimum visibility.



ENVIRONMENT AND CLIMATE

IBIZA units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured. The plastic interior drip tray guarantees easy cleaning.



HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. In addition, the electronically controlled, variable-speed compressor (VS) and a new energy-saving fan ensure maximum energy efficiency.



VISUAL MERCHANDISING

Thanks to mist-free glass panels on all four sides, IBIZA offers excellent visibility of the goods on display. The bright LED interior lighting ensures perfect product presentation. In addition, the robust, smooth-running, completely encased sliding glass cover guarantees easy removal of merchandise.



INTELLIGENT INSTALLATION

Ready-to-connect installation means IBIZA can be used immediately. ABS injection makes the refrigeration unit extremely robust. In addition, the sliding glass cover is lockable.



COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling	+3°C to +15°C ¹
Freezing	-18°C to -23°C
Mince meat/meat chilling	0°C to +2°C

¹ Fixed preset that can be changed by a service technician

USPs

PERFECT PRODUCT PRESENTATION

The large panoramic sliding glass lids and the four-sided glazing optimize the product visibility. In addition, Ibiza scores thanks to its low height and easy product removal.

ACCESSIBILITY

IBIZA is accessible from all four sides and the removal of goods for customers is easy.





IBIZA 100



IBIZA 145



IBIZA 210

CONFIGURATIONS

Solo



Row






ACCESSORIES

- _ Scanner strip
- _ Vario grid system (rack inserts & wire dividers) & baskets & product dividers
- _ Illuminated LED advertising panel
- _ Colour and styling options tailored to customer requirements (housing, protective bumper strip, plastic parts in 2 standard colours)
- _ Key lock
- _ Compatible with the Active Monitoring System (AMS)

IBIZA 100 / 145 / 210

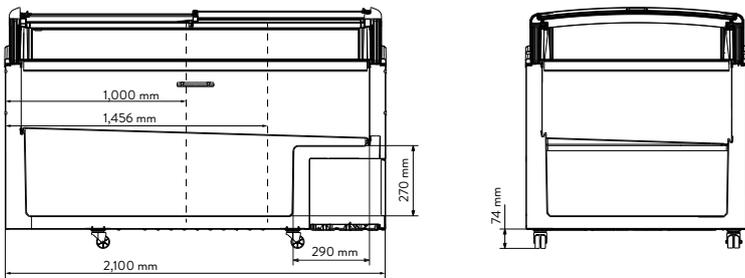

DIMENSIONS

IBIZA		100	145	210
Length, exterior / interior	mm	1,000 / 872	1,456 / 1,328	2,100 / 1,973
Depth, exterior / interior	mm	851 / 723	851 / 723	851 / 723
Height, front / rear	mm	900 / 925	900 / 925	900 / 925
Stacking height, front / rear	mm	500 / 500	500 / 500	500 / 500


Subject to technical changes; errors and omissions excepted. Version: 01/2022



AHT Cooling Systems GmbH
 Werkgasse 57
 8786 Rottenmann | Austria
 p. +43 3614 24 51-000
 sales@aht.at
 www.aht.at



CONFIGURATIONS

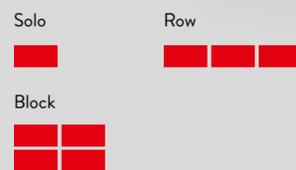

_ optionally with end cabinet on both sides


BLOCK INSTALLATION



KINLEY XL

_ Overhead freezer cabinet. Ready to connect

www.aht.at

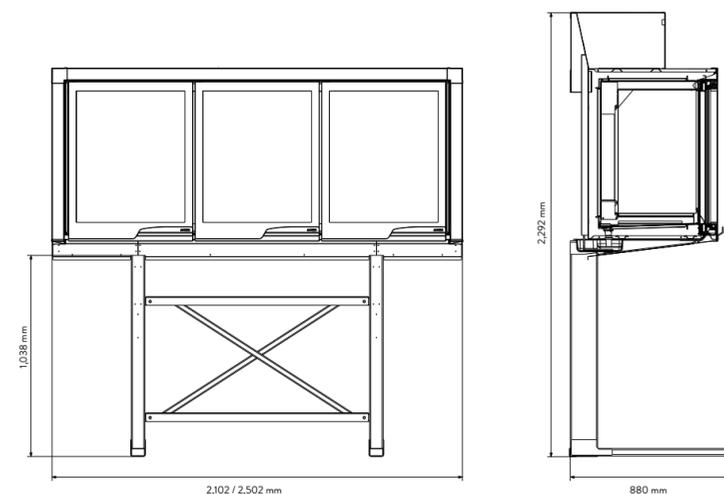

DIMENSIONS

KINLEY XL		210	250
Length, exterior / interior	mm	2,102 / 1,970	2,502 / 2,370
Depth, exterior / interior	mm	663 / 400	663 / 400
Height, exterior / interior	mm	1,317 / 800	1,317 / 800
Stacking height, front / rear	mm	750	750

Subject to technical changes; errors and omissions excepted. Version: 03/2022

More sales space in the same store area.

KINLEY XL offers plenty of space in your customers' relevant field of view. Thanks to AHT's ready-to-connect solution, KINLEY XL is easy to install and immediately ready for operation.

★ VISUAL MERCHANDISING

KINLEY XL perfectly combines product presentation with access to merchandise, thanks to presentation at eye level. The brilliant LED interior lighting optimises the sales effect. Height-adjustable and optionally with baskets instead of shelves, KINLEY XL is the expedient extension to AHT refrigerator/freezers.

✋ INTELLIGENT INSTALLATION

Ready-to-connect installation means KINLEY XL can be used immediately – completely without outlets as well. KINLEY XL is also a team player, as it is combinable with every AHT refrigerator/freezer. For regions with high humidity, it is also available with optional heated doors.

♻️ ENVIRONMENT AND CLIMATE

KINLEY XL units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). This makes them particularly environmentally friendly. R290 has the lowest global warming potential (GWP) rating on the market.

⚡ LOW COSTS

Thanks to its low energy consumption and minimum maintenance requirements. Its integrated defrost water evaporation feature without an electric heater requires less energy, making KINLEY even more efficient.

❄️ SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting ensures the shelf life and hygiene of all the products at all times.

🌐 COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores. Our products are also compatible with other systems.

USPs

MORE SELLING SPACE IN THE SAME SHOP SPACE

Wherever you use an AHT refrigerator or freezer unit, you have the opportunity to significantly increase your selling space in the same floor area.

ENERGY EFFICIENCY

The combination of KINLEY XL and an AHT freezer reduces the energy consumption by up to 50% compared with commercial vertical freezer systems.



INDIVIDUAL BRANDING

KINLEY XL can be individually adapted to the store design. A wide range of colours allows the best possible integration.

TEMPERATURE RANGES

Freezing

-18°C to -23°C

ACCESSORIES

- _ Side cover
- _ Chest cover
- _ Scanner strips
- _ Hanging baskets
- _ Colour options: Housing available in various RAL colours
Plastic parts in RAL 7045 and RAL 7022
Door frames in RAL 7045 and RAL 7022
- _ One- or two-level hanging grid
- _ Compatible with the Active Monitoring System (AMS)
- _ Product dividers for flexible segmentation
- _ Interior fittings available in various RAL colours



AC & GD

_Promotion chiller. Ready to connect

Unmissable presence.

With the AC COOLER series, you present your products in an effective and highly visible way.



VISUAL MERCHANDISING

Thanks to a wide range of sizes, the AC COOLER series offers a suitable solution for all space situations. With the open front and glass side panes, goods are highly visible and presented to the best advertising effect. The backlit and customisable head part guarantees attention.



HIGH ENERGY SAVINGS

The sensor that automatically switches off the light, the cooling curtain for night-time operation with integrated energy-saving circuit, and models with glass doors ensure maximum energy efficiency.



ENVIRONMENT AND CLIMATE

The AC COOLER is completely CFC- and HFC-free and operates with the ecologically harmless and natural refrigerant propane (R290). This makes it particularly environmentally friendly.



INTELLIGENT INSTALLATION

Rollers allow the AC COOLER series to be positioned easily and put into operation immediately thanks to plug-in. Piping and additional connections are not necessary.



SIMPLE DEFROSTING

Defrosting and hot-water condensate evaporation take place automatically in the AC COOLER. In addition, the air curtain ensures optimum cooling capacity.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling

-1°C to 7°C

USPs

MAXIMUM FLEXIBILITY

The AHT AC COOLER offers the optimum solution for every space. Different installation dimensions, optional doors and individual head part branding combined with smart features make the AC COOLER perfect for use at the point of sale.

MINIMUM SERVICE WORK

Thanks to the newly developed cartridge technology, maintenance work is completed swiftly on AC COOLERS. Simply replace the chiller cartridge fitted in the bottom of the unit and you're ready to go again. No products need to be cleared out, and everything is completed in less than 15 minutes.



AC M



AC S



AC W



AC XL



GD XL


ACCESSORIES

- _ Unit body in all RAL colours
- _ Styling tailored to customer requirements (wrapping)
- _ Price display/price strip




GD XLS


ACS

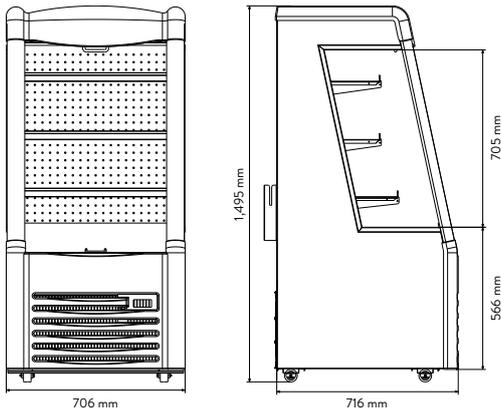


ACW

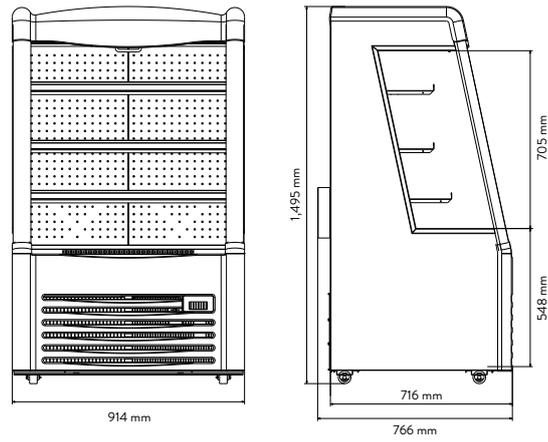

ACM

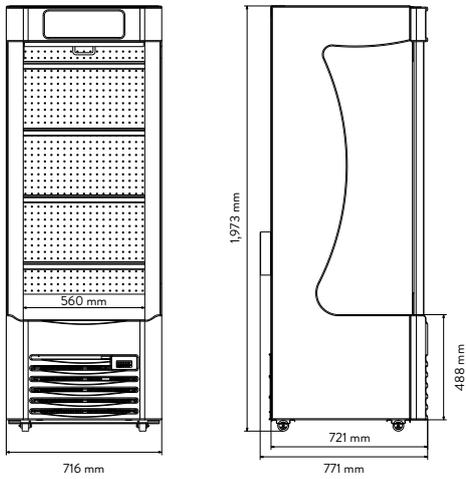


ACXL

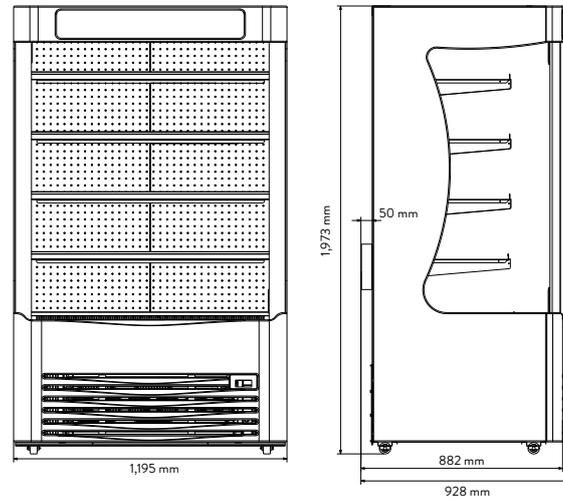


DIMENSIONS

AC COOLER		AC M	ACS	AC W	AC XL
Length, exterior / interior	mm	716 / 624	706 / 624	914 / 835	1,195 / 1,105
Depth, exterior / interior	mm	771 / 420	766 / 428	766 / 428	928 / 552
Height, exterior / interior	mm	1,973 / 1,365	1,495 / 846	1,495 / 846	1,973 / 1,292
Shelf depth	mm	4x388	2x321 / 1x388	2x321 / 1x388	4x508

GD XL

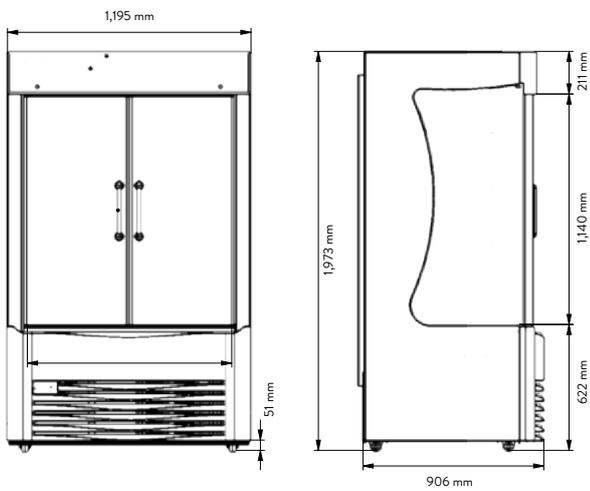

GD XLS

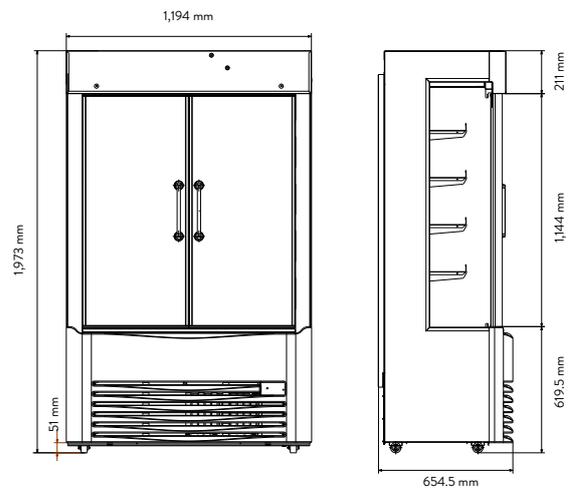

DIMENSIONS

GD		GD XL	GD XLS
Length, exterior / interior	mm	1,225 / 1,095	1,195 / 1,105
Depth, exterior / interior	mm	906 / 696	655 / 694
Height, exterior / interior	mm	1,973 / 1,319	1,973 / 1,360
Shelf depth	mm	4 x 563	4 x 320



BOSTON

_Chest freezer. Full Plug-in

Strong in Design, strong in functionality

BOSTON is accessible from all sides and easily visible. The strong design and total flexibility makes it the perfect freezer for selling scooping ice cream.



VISUAL MERCHANDISE

BOSTON combines attractive product presentation with optimal product visibility from all sides. This ensures high sales attractiveness.



LOW COSTS

The low investment and operating costs speak for themselves. In addition, BOSTON is completely maintenance-free in terms of refrigeration technology.



HIGH ENERGY SAVINGS

Save money with the sophisticated technology and construction compared to conventional ice cream display cases. Greater efficiency is achieved above all by the new energy-saving fan, which saves 0.5 kWh of energy per day.



SMART INSTALLATION

Thanks to the plug-in installation, BOSTON can be used immediately. Simply connect it to a power outlet and it starts operating.



ENVIRONMENT AND CLIMATE

BOSTON is completely CFC and FFC-free and uses the ecologically harmless and natural refrigerant propane (R290). They are therefore particularly environmentally friendly.



RETAIL AND STORAGE SPACE

BOSTON offers space for 22 pans of 5 liters each. In addition, another 22 pans can be stowed on a second level.

INDIVIDUELLES BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Freezing

-12°C to -23°C

USPs

EXCELLENT PRODUCT PRESENTATION

The illuminated glass dome is a real customer magnet. The sales figures are maximized through the optimal product presentation of the scooping ice cream.

EASY ACCESSIBILITY


BOSTON is optimally accessible for the sales staff. This makes serving ice cream convenient and easy.



ACCESORIES

- _ Bumper strips available in different colors
- _ Water protection strips prevent dust and water from penetrating under the devices

BOSTON

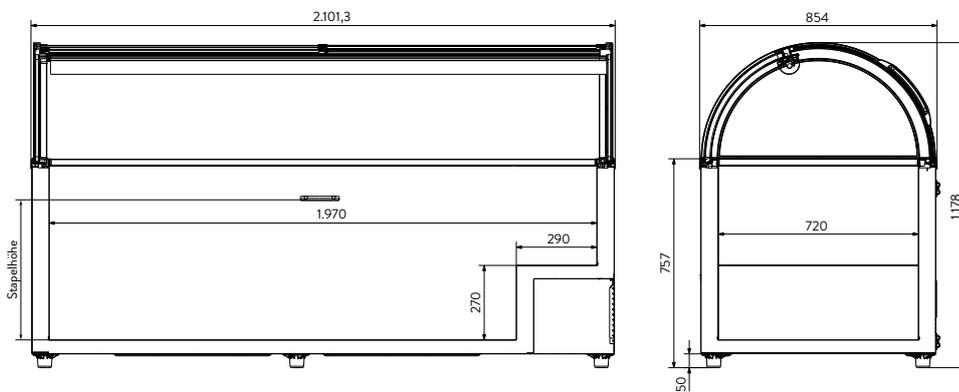

DIMENSIONS

BOSTON		210	
length, exterior / interior	mm	2,101 / 1,968	
Depth, exterior / interior	mm	854 / 718	
Height, front / rear	mm	1,178 / 1,178	
Stack height	mm	540	



RIO S & RIO H

_Freezer cabinet. Plug-in installation

USPs

PERFECT FOR CHILDREN

Due to the reduced height ice cream is easily accessible even for children. The glass sliding lids are opening and closing smoothly.

INDEPENDENT POSITIONING

RIO can be served from both sides and is the ideal solution for every area because of different size variants.

TEMPERATURE RANGES

Freezing -14 °C to -23 °C

Scooping ice cream -6 °C to -23 °C



Versatile and seductive.

RIO models are the perfect choice for selling ice cream in various places. The broad variety of sizes ensure perfect integration in any store layout and boost your sales.



VISUAL MERCHANDISING

RIO is displaying the goods perfectly to customers due to its low height it can easily be looked into. The smooth-running, two-part, straight sliding glass lid with the proven, patented, sprayed one-piece AHT cover frame ensures easy goods removal. The brilliant LED interior lighting presents your goods in best conditions.



LOW COSTS

The proven AHT quality guarantees you a trouble-free longevity. RIO is delivered in a robust packaging accessible for forklifts.



ENVIRONMENT AND CLIMATE

RIO is completely free of CFCs and HFCs and runs with the ecologically harmless and natural refrigerant propane (R290). R290 has one of the lowest GWPs (global warming potential) on the market.



HIGH ENERGY SAVINGS

RIO scores with low energy consumption through reinforced insulation (72 mm). In addition the new optimized fan allows 0.5 kWh energy saving per day.



MULTIFUNCTIONAL PURPOSE

With the same height and depth RIO is available in different lengths. The inner container of white pre-painted and galvanized sheet metal harmonizes with the one-piece plastic frame perfectly. RIO specially scores with the adjustable thermostat and the outer skin condenser. Pollution and maintenance is therefore a thing of the past.



INTELLIGENT INSTALLATION

Thanks to the plug-in installation, RIO is immediately ready for use. With RIO you get a team player who also works with other AHT cooling and freezing units.



INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



RIO H 68



RIO H 100



RIO H 125



RIO S 68



RIO S 100



RIO S 125



RIO H 150



RIO H 175



RIO S 150



RIO S 175

ACCESSORIES


- _Temperature display: outer (front wall) and/or indoor thermometer
- _Condensate drain
- _robust castors (can be braked)
- _Interior light / LED light for RIO S
- _Light canopy
- _Energy-saving fan
- _Insulation cover for horizontal RIO chests
- _baskets and dividers
- _Lock for sliding covers
- _Additional mounting options in the form of rivet nuts
- _Frame heating for RIO S



 DIMENSIONS


RIO S		68	100	125	150	175
length, exterior / interior	mm	680 / 530	1.000 / 850	1.250 / 1.100	1.500 / 1.350	1.750 / 1.600
depth, exterior / interior	mm	650 / 500	650 / 500	650 / 500	650 / 500	650 / 500
height outside front / rear	mm	769 / 883	769 / 883	769 / 883	769 / 883	769 / 883
stacking height front / rear	mm	530 / 570	530 / 570	530 / 570	530 / 570	530 / 570

RIO S

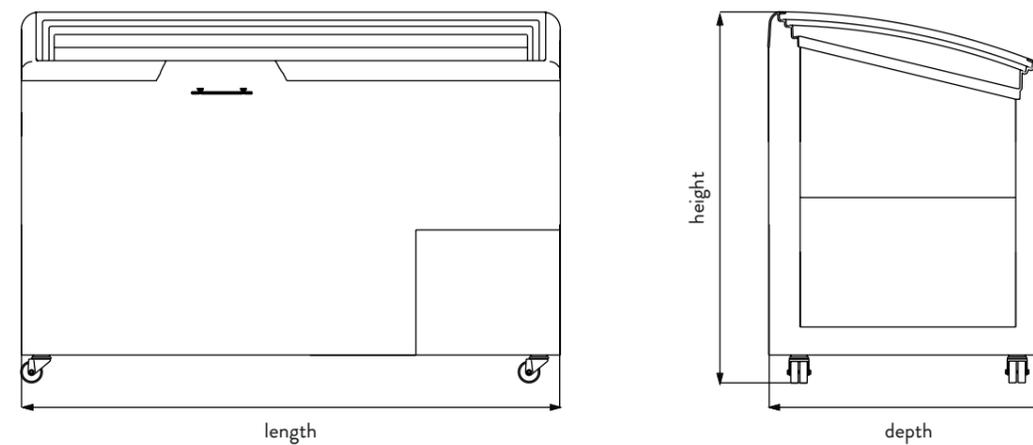

RIO H		68	100	125	150	175
length, exterior / interior	mm	680 / 530	1.000 / 850	1.250 / 1.100	1.500 / 1.350	1.750 / 1.600
depth, exterior / interior	mm	650 / 500	650 / 500	650 / 500	650 / 500	650 / 500
height outside front / rear	mm	883 / 883	883 / 883	883 / 883	883 / 883	883 / 883
stacking height	mm	610	610	610	610	610

RIO H

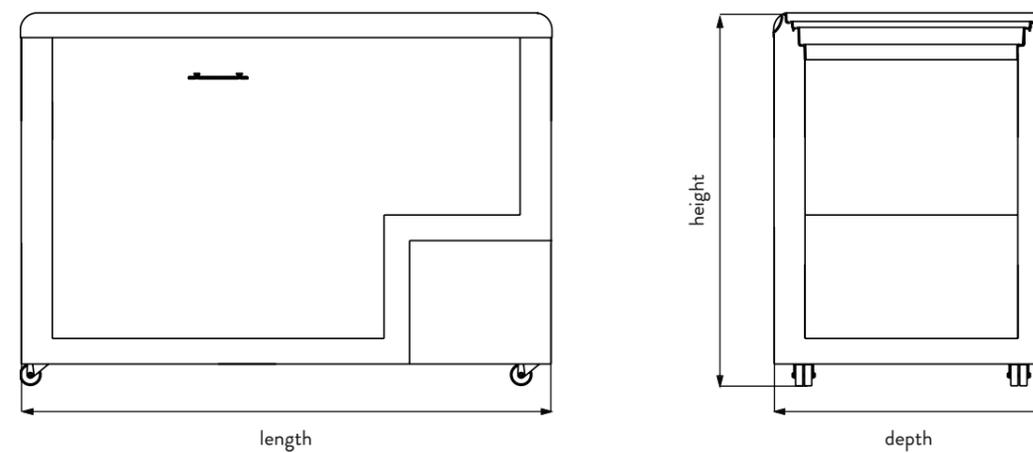

AHT Cooling Systems GmbH
Werksgasse 57
8786 Rottenmann | Austria

t. +43 3614 24 51-0
sales@aht.at
www.aht.at

©AHT Cooling Systems GmbH
Subject to technical changes and typographical errors
Version: 04/2024